

**EURAPIPE**

**EURAPIPE®**

**ABScon®**

High Impact ABS Conduit

UV Resistant

Lead & Halogen Free

Corrosion Resistant






# The Material

Acrylonitrile-Butadiene-Styrene (ABS) identifies a family of engineering thermoplastics with an exceptionally broad range of performance characteristics.

**Acrylonitrile** provides chemical resistance and rigidity.

**Butadiene** is a rubber which gives the material its exceptional impact resistance and low temperature toughness.

**Styrene** contributes to the ease of processing and rigidity.

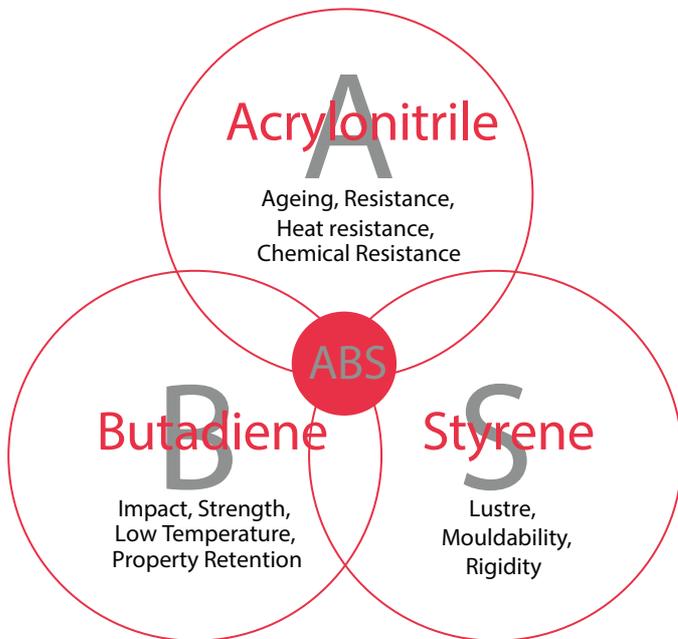

# Features

The outstanding properties of ABS are:

## Impact strength

ABS has exceptional impact strength over a broad range of temperatures. It is the butadiene rubber phase of the copolymer that makes ABS shatter proof and allows ABS to withstand impact levels much higher than those of other plastic conduits. It also retains this impact resistance at sub zero temperatures.

## Corrosion resistant

ABScon is resistant to damage from a wide range of chemicals. It has good resistance when in contact with inorganic acids, alkalis and metal salts, which will corrode most metal conduits. It can also be used in areas of contact with oils and fats. It is recommended that ABScon not be used in areas in contact with aromatic hydrocarbons and solvents such as ketones or esters.

## Direct Sunlight Resistant

ABScon performs excellently in harsh weather conditions. Its corrosion resistance combined with heat stability and resistance to damage through sunlight, means that it retains superior impact resistance and strength even after long term exposure to the harshest weather.

## Temperature range

ABScon can be used in a broad range of temperatures. It does not become brittle at temperatures down to  $-30^{\circ}\text{C}$  and it maintains rigidity and strength at temperatures up to  $60^{\circ}\text{C}$ . This allows ABScon to be used in areas such as refrigerated cool rooms and hot process environments.

## Light weight

ABScon is light weight. High Impact ABScon conduit weighs on average 30% less than the equivalent Heavy Duty PVC conduit and 75% less than steel conduit. This means easier installation and transportation.

## Rigid

ABS is a rigid thermoplastic, providing high security against crushing. ABScon's rigidity also allows for ease of installation on straight runs and a minimum of support brackets. ABScon is designed to remain straight even at its maximum operating temperature when installed as recommended.

## Insulating

ABS is an excellent insulator providing extra protection for equipment and personnel. There is no need for earthing or maintaining electrical continuity through joints and connections.

## Water-tight

ABScon's solvent welded joints provide a simple leak-tight seal against water, other fluids, dust and contaminants ensuring protection for wiring and personnel.

## Lead and Halogen Free

ABS is lead and halogen free. If burned ABS does not release corrosive gasses. ABS can be readily recycled.

# Installation

## Installation

ABScon should be installed according to the relevant sections and international industry standards and regulations as applicable to non metallic conduit.

ABScon should be supported on straight runs with correctly sized clips or saddle clips at intervals of not more than 1 metre. Clips and saddle clips must be installed so as to allow longitudinal movement of the conduit.

## Joining

ABScon conduits and fittings are easily joined by using ABS Solvent Cement. To ensure a strong watertight joint follow these steps:

1. Cut conduit to length using a fine tooth hack saw or pipe cutters and remove all swarf and burrs.
2. Clean the joining surfaces of the pipe and fitting with a clean rag dipped in MEK Cleaner.
3. Coat both surfaces with ABS solvent cement and push together immediately. Do not twist.

4. Wipe off any excess solvent cement. Do not handle the joint for approximately 5 minutes. Full joint strength is achieved 24 hours after joining.

## Bending

Due to its high softening temperature ABScon cannot be bent cold. A full range of bends is available to ensure simple and convenient installation.

Conduits up to 32 mm can be bent on site using the following procedure:

1. Insert a correctly sized bending spring or some other type of internal mandrel.
2. Using a portable gas torch gently heat up the area to be bent, rotating it continuously to ensure even softening. Do not play the flame directly on to the pipe wall. Surface discolouration indicates overheating and damage to the conduit.
3. When the pipe becomes soft and flexible, bend to slightly more than required and allow the bend to ease back to the desired angle.

4. Hold the bend in place until cool. Cooling can be accelerated using a wet rag.

The minimum radius around which ABScon should be bent is 4 times the diameter of the conduit.

## Expansion

Expansion due to changes in temperatures can be accommodated by using conduit routing to minimise problems.

Expansion can be accommodated by using the inherent ductility and flexibility of ABS. By not restraining the conduit at changes of direction the conduit can be allowed to flex and convert the expansion along the run into a bending action on the adjoining leg.

For buried conduits no measures need to be taken to control expansion.

### IMPORTANT NOTE

This product is designed to provide mechanical protection for insulated and sheathed electrical wiring and is not suitable for use where the wiring is not sheathed.

In such installations only use conduit that meets the requirements of AS/NZS 2053 - 2001.



# ABScon Specifications

ABScon conduit (all dimensions in mm)				
Nominal Size	Product Code	Outside Diameter	Wall Thickness	Inside Diameter
20	R51.533.020	20.0	2.4	15.2
25	R51.533.025	25.0	2.6	19.8
32	R51.533.032	32.0	2.8	26.4
40	R51.533.040	40.0	3.2	33.6
50	R51.533.050	50.0	3.6	42.8
63	R51.533.063	63.0	4.2	54.6
80	R51.533.080	88.9	5.0	79.0
100	R51.533.100	114.3	6.3	101.7
150	R51.533.150	168.3	8.8	150.7

ABScon is typically supplied in 4m plain ended lengths


ABScon conduit properties	
<b>Physical properties</b>	
Specific gravity	1.05
Ultimate tensile strength	40MPa
Elongation at break	50%
Instantaneous flexural modulus	2200 MPa
Izod impact strength (notched)	340 J/m notch
<b>Thermal properties</b>	
Operating temperature range	-30 to 60°C
Vicat softening point	95°C
Coefficient of linear expansion	10.1 x 10 <sup>-5</sup> m/m <sup>2</sup> C
Thermal conductivity	0.25W/m <sup>2</sup> K
<b>Electrical properties</b>	
Volume resistivity	3.5 x 10 <sup>16</sup> Ωcm
Dielectric constant	95°C
Coefficient of linear expansion	3.12 at 1000 Hz
Flammability	ABS is not self extinguishing
ABScon is Halogen free and produces no corrosive gasses in the event of fire.	
<b>Chemical resistance of ABS conduit</b>	
Strong acids	Limited resistance
Weak acids	Good
Alkalis	Good
Metal salts	Excellent
Aromatic hydrocarbons	Poor
Organic Solvents	Poor
ABSconduit absorbs less than 1% water and is classed as non-hygroscopic	



# ABScon Fittings


Size (mm)

20      25      32      40      50      63      80      100      150




SOCKET BLACK

R51.100.020   R51.100.025   R51.100.032   R51.100.040   R51.100.050   R51.100.063   R51.100.080   R51.100.100   R51.100.150



Bend 90°

R51.297120.020   R51.297120.025   R51.297120.032   R51.297120.040   R51.297120.050   R51.297120.063   R51.297120.080   R51.297120.100   R51.297120.150



Bend 45°

R51.295120.020   R51.295120.025   R51.295120.032   R51.295120.040   R51.295120.050   R51.295120.063   R51.295120.080   R51.295120.100   R51.295120.150



EURATECH INDUSTRIES SDN. BHD. (1139734-M) , LOT 1478, NILAI INDUSTRIAL ESTATE PHASE II, 71800 NILAI, NEGERI SEMBILAN, MALAYSIA  
T: +6 06 799 8989 F: +6 06 799 8626 E: [euratech@euratech.com.my](mailto:euratech@euratech.com.my) W: [www.euratech.com.my](http://www.euratech.com.my)

All Euratech trademarks logos are owned by Euratech Industries Sdn. Bhd. All other brand or product names are trademarks or registered marks of their respective owner. Because we are continuously improving our products and services, Euratech Industries Sdn. Bhd. reserves the right to change specifications without prior notice. All Rights Reserved.